


# SPECIALS

Hand Scraped

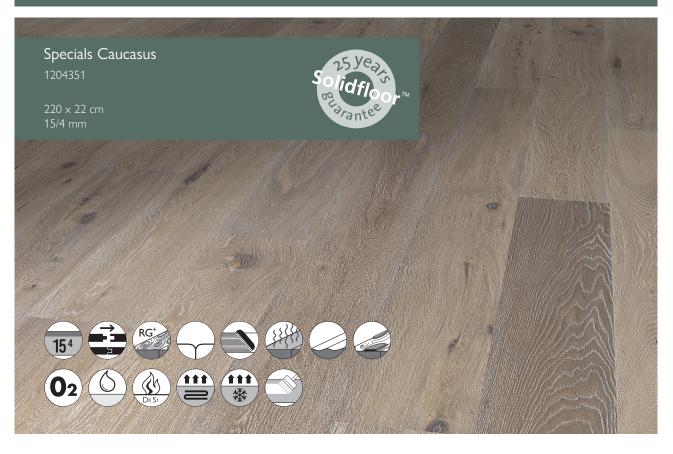

## Packaging

Boards per pack: m<sup>2</sup> per pack: Weight per pack: Broken lenghts per pack:

## Dimensions

Length: Width: Thickness (total): Top layer: 6 boards 2,904 m<sup>2</sup> 23 kg 25% minimal 60 cm length

## 220 cm 22 cm

15 mm

3.5-4.0 mm

Dimensional tolerances according to EN13489

| Length:                              | 0,20%                  |
|--------------------------------------|------------------------|
| Width:                               | 0,2 mm                 |
| Thickness:                           | Total: 15 mm ± 0,2 mm  |
| Top layer:                           | 3,5-4,0 mm             |
| Height difference between the panels | :: ≤0,2 mm             |
| Squareness:                          | ≤0.2% across the width |
| Cup:                                 | ≤0.2% across the width |
| Spring:                              | ≤0.1% over the length  |
| Bend:                                | ≤1% over the length    |

## Other Specifications

Formaldehyde emission: Insulation value: Brinell hardness:

## Additional specifications

Bevel: Construction: Moisture content: Locking system:

## Instructions and Maintenance

Oil immediately after installation. Maintain with Solidfloor™ Ultimate Hardwax White & Solidfloor™ Woodcleaner. Suitable for underfloor heating & cooling (visit www.solidfloor.com for more information).

E1

R=0,115m2 k/w

Average HB 3.7

Rounded

3-layerd

7% +/- 2%

Tongue and groove

