


## **SPECIALS** Fine Sawn

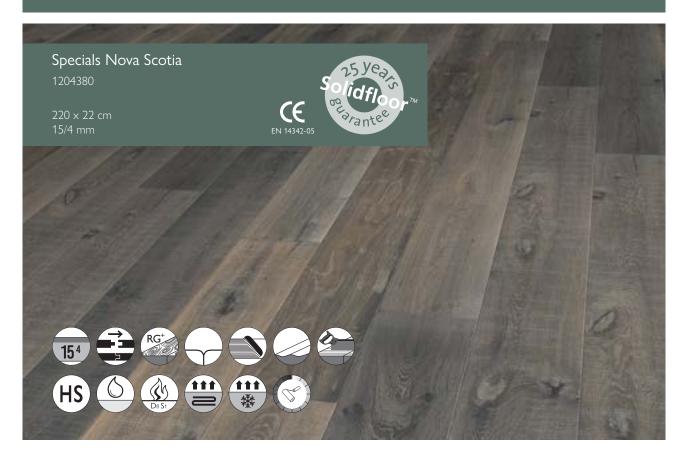

**Packaging** 

Boards per pack: 6 boards 2.904 m<sup>2</sup> m² per pack: Weight per pack: 22 kg

25% minimal 60 cm length Broken lenghts per pack:

**Dimensions** 

Length: 220 cm Width: 22 cm Thickness (total): 15 mm 3.5-4.0 mm Top layer:

Dimensional tolerances according to EN13489

Length: 0,20% Width: 0,2 mm

Total: 15 mm ± 0,2 mm Thickness:

3,5-4,0 mm Top layer: Height difference between the panels: ≤0,2 mm

≤0.2% across the width Squareness: Cup: ≤0.2% across the width ≤0.1% over the length Spring: Bend: ≤1% over the length

## Other Specifications

Formaldehyde emission: Insulation value: R=0,115m2 k/w Brinell hardness: Average HB 3.7

## Additional specifications

Rounded Construction: 3-layerd 7% +/- 2% Moisture content: Locking system: Tongue and groove

## Instructions and Maintenance

Does not need to be oiled after installation. Maintain with Solidfloor™ Ultimate Hardwax White & Solidfloor™ Woodcleaner. Suitable for underfloor heating & cooling (visit www.solidfloor.com for more information).









